

# Herkules 4002

## High Adhesion Tape with Acrylic Adhesive

Created: 2019-08-20

### GENERAL INFORMATION

---

Herkules 4002 is a double sided tape with a PVC carrier coated with a acrylic adhesive. Has a high initial tack, holding power, weatherability, and adheres well on most surfaces and materials.


- 0,21mm thick
- Acrylic adhesive
- Temperature resistant up to 90°C
- High initial tack

Herkules 4002 can be die-cut for custom made parts and is available in all dimensions but standard widths are:

- 9mm x 50m
- 12mm x 50m
- 15mm x 50m
- 19mm x 50m
- 25mm x 50m

### CONSTRUCTION

---

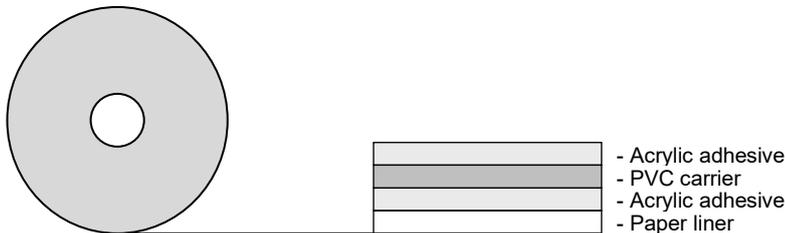

### APPLICATIONS

---

Herkules 4002 adheres well on many different types of surfaces and materials and has a high initial adhesion, which makes it suitable for applications in various industries and applications requiring permanent and strong bonding.

- Adhering and fixing molding and window decorations
- Self-adhesive mounting of decorative and packaging materials
- Other permanent bonding applications
- Bonding of foils, fabrics, paper and plastic materials

### USER GUIDELINES

---

To obtain optimal adhesion the surfaces must be clean and dry. Most frequent cleaning solvent is isopropyl/water (50:50 mixture) alcohol. Use safety instructions before using cleaners. Sometimes depending on surface a primer can be used to obtain a higher bonding force. Ideal temperature for tape application is between 18°C and 25°C.

## PRODUCT DATA

---

### Physical Data:

Adhesive:	Acrylic
Carrier:	PVC
Thickness:	0,21 mm
Liner:	Paper liner
Colour:	White
Shelf life*:	2 years
Storage:	Good storage conditions are in room temperature. Not recommended for direct exposure to sunlight or ultraviolet light.

\* From date of dispatch by ATC Tape Converting AB

### Performance Data:

Holding power: A/B side (PSTC-7)	24 hrs, 1kg/25mm <sup>2</sup>
Holding Power for Temp. resistance 60°C: (PSTC-7)	24h 0,5kg/25mm <sup>2</sup>
Adhesion: A/B side (PSTC-1)	23,4 – 29,3 N/25mm
Initial tack: A/B side (PSTC-6#14 ball)	5 cm
Peel strength:	>3200 - 4000 g/25mm
Solvent resistance:	Good
Heat resistance:	Up to +90°C

## CONTACT INFORMATION

---

### ATC Adhesive Tape Converting AB

Veddestavägen 17, Box 575  
175 26 Järfälla, SWEDEN

Telephone: +46 (0)8-564 708 80  
Fax: +46 (0)8-564 708 89

E-mail: [info@atc.se](mailto:info@atc.se)  
Web: [www.atc.se](http://www.atc.se)

