

# Herkules 7010

## Cloth Tape with Acrylic Adhesive

Created: 2010-12-28  
Updated: 2018-01-04

### GENERAL INFORMATION

---

Herkules 7010 is a double sided tape with a rayon carrier coated with a soft acrylic adhesive. Easy to tear by hand and leaves no residue after removal. It is excellent for temporary applications at exhibitions and displays.


- 0,22mm thick
- Acrylic adhesive
- Temperature resistant up to 110°C
- Easy to apply and leaves no residue

Herkules 7010 can be die-cut for custom made parts and is available in all dimensions but standard widths are:

- 12mm x 50m
- 25mm x 50m
- 50mm x 50m

### CONSTRUCTION

---

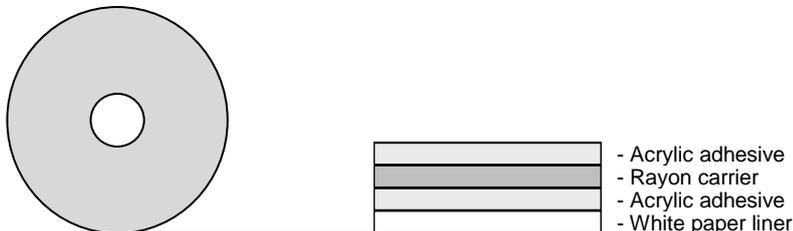

### APPLICATIONS

---

Herkules 7010 is used in many different industries and sectors. It is very easy to apply and is ideal for temporary applications at exhibitions and displays. Typical applications are:

- Conference and exhibition halls
- Flooring
- Displays

### USER GUIDELINES

---

To obtain optimal adhesion the surfaces must be clean and dry. Most frequent cleaning solvent is isopropyl/water (50:50 mixture) alcohol. Use safety instructions before using cleaners. Sometimes depending on surface a primer can be used to obtain a higher bonding force. Ideal temperature for tape application is between 21°C and 38°C.

## PRODUCT DATA

---

### Physical Data:

|              |  |
|--------------|--|
| Adhesive:    | Acrylic  |
| Carrier:     | Rayon  |
| Thickness:   | 0,22mm   |
| Liner:       | White siliconised paper  |
| Colour:      | White  |
| Shelf life*: | 12 months  |
| Storage:     | Good storage conditions are in room temperature. Not recommended for direct exposure to sunlight or ultraviolet light. |

\* From date of dispatch by ATC Tape Converting AB

### Performance Data:

|                                   |                 |
|-----------------------------------|-----------------|
| Peeling strength:<br>(AFERA 4001) | 10 N/25mm       |
| Tear resistance:<br>(DIN 53112)   | 210 N/50mm      |
| Heat resistance:                  | -30°C to +110°C |
| Condensation water<br>resistance: | Good            |
| Ageing resistance:                | Very good       |
| Softener resistance:              | Very good       |

## CONTACT INFORMATION

---

**ATC Adhesive Tape Converting AB**  
Veddestavägen 17, Box 575  
175 26 Järfälla, SWEDEN

Telephone: +46 (0)8-564 708 80  
Fax: +46 (0)8-564 708 89

E-mail: [info@atc.se](mailto:info@atc.se)  
Web: [www.atc.se](http://www.atc.se)



**Intertek Intertek**