

Jupiter 4029

Black Vinyl Plastic Tape with Rubber Adhesive

Created: 2007-10-29
Updated: 2018-01-04

GENERAL INFORMATION


Jupiter 4029 is a black single sided vinyl plastic tape for multipurpose use. It's coated with a high-tack rubber adhesive that adheres well on a wide variety of surfaces and materials.

- 0,13mm thick
- Rubber adhesive
- Temperature resistant up to 75°C
- Leaves no adhesive residue

Jupiter 4029 can be die-cut for custom made parts and is available in all dimensions but standard widths are:

- 9mm x 33m
- 19mm x 33m
- 25mm x 33m
- 50mm x 33m

CONSTRUCTION

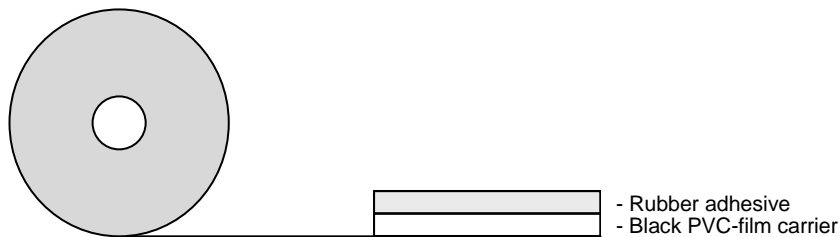

APPLICATIONS

Jupiter 4029 can be used for a wide range of applications in many different industries. The high-tack rubber adhesive makes it suitable on most materials and surfaces without leaving any adhesive residue after removal. Examples of application areas are

- General purpose masking
- Reparation
- Winding
- Floor marking

USER GUIDELINES

To obtain optimal adhesion the surfaces must be clean and dry. Most frequent cleaning solvent is isopropyl/water (50:50 mixture) alcohol. Use safety instructions before using cleaners. Sometimes depending on surface a primer can be used to obtain a higher bonding force. Ideal temperature for tape application is between 21 °C and 38 °C.

PRODUCT DATA

Physical Data:

Adhesive:	Rubber
Carrier:	PVC-film
Thickness:	0,13mm
Liner:	-
Colour:	Black
Shelf life*:	24 months
Storage:	Good storage conditions are in room temperature. Not recommended for direct exposure to sunlight or ultraviolet light.

* From date of dispatch by ATC Tape Converting AB

Performance Data:

Tensile strength:	150 N/25mm
Elongations:	60%
Adhesion:	7,0 N/25mm
Heat resistance:	-10°C to +75°C

CONTACT INFORMATION

ATC Adhesive Tape Converting AB

Veddestavägen 17, Box 575
175 26 Järfälla, SWEDEN

Telephone: +46 (0)8-564 708 80
Fax: +46 (0)8-564 708 89

E-mail: info@atc.se
Web: www.atc.se



Intertek Intertek