

# Jupiter 4033

## Black/yellow Vinyl Plastic Tape

Created: 2007-10-29  
Updated: 2018-01-04

### GENERAL INFORMATION

---

Jupiter 4033 is a black/yellow colored single sided vinyl plastic tape for multipurpose use. It's coated with a high-tack rubber adhesive that adheres well on a wide variety of surfaces and materials. Easy to apply.


- 0,13mm thick
- Rubber adhesive
- Temperature resistant up to 75°C
- Leaves no adhesive residue

Jupiter 4033 can be die-cut for custom made parts and is available in all dimensions but standard widths are:

- 50mm x 33m

### CONSTRUCTION

---

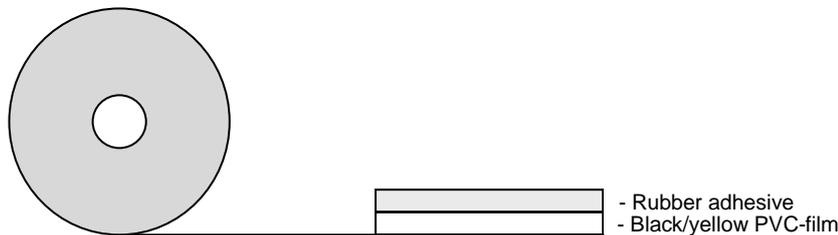

### APPLICATIONS

---

Jupiter 4033 can be used for a wide range of applications in many different industries. The high-tack rubber adhesive makes it suitable on most materials and surfaces without leaving any adhesive residue after removal. Examples of application areas are

- General purpose masking
- Reparation and protection
- Decoration
- Winding
- Floor/glass marking

### USER GUIDELINES

---

To obtain optimal adhesion the surfaces must be clean and dry. Most frequent cleaning solvent is isopropyl/water (50:50 mixture) alcohol. Use safety instructions before using cleaners. Sometimes depending on surface a primer can be used to obtain a higher bonding force. Ideal temperature for tape application is between 21°C and 38°C.

All values above are average values and are not to be specific. To be sure about finished result we recommend that you do testing and use the product to determinate the function of the tape for your application. ATC Adhesive Tape Converting AB does NOT take any responsibility or liability direct or consequential for any loss or damage caused by using our product.

## PRODUCT DATA

---

### Physical Data:

Adhesive:	Rubber
Carrier:	PVC-film
Thickness:	0,13mm
Liner:	-
Colour:	Black/yellow
Shelf life*:	24 months
Storage:	Good storage conditions are in room temperature. Not recommended for direct exposure to sunlight or ultraviolet light.

\* From date of dispatch by ATC Tape Converting AB

### Performance Data:

Tensile strength:	20 N/10mm
Elongations:	150%
Adhesion:	1,5 N/10mm
Heat resistance:	-10°C to +75°C

## CONTACT INFORMATION

---

### ATC Adhesive Tape Converting AB

Veddestavägen 17, Box 575  
175 26 Järfälla, SWEDEN

Telephone: +46 (0)8-564 708 80  
Fax: +46 (0)8-564 708 89

E-mail: [info@atc.se](mailto:info@atc.se)  
Web: [www.atc.se](http://www.atc.se)



**Intertek Intertek**